


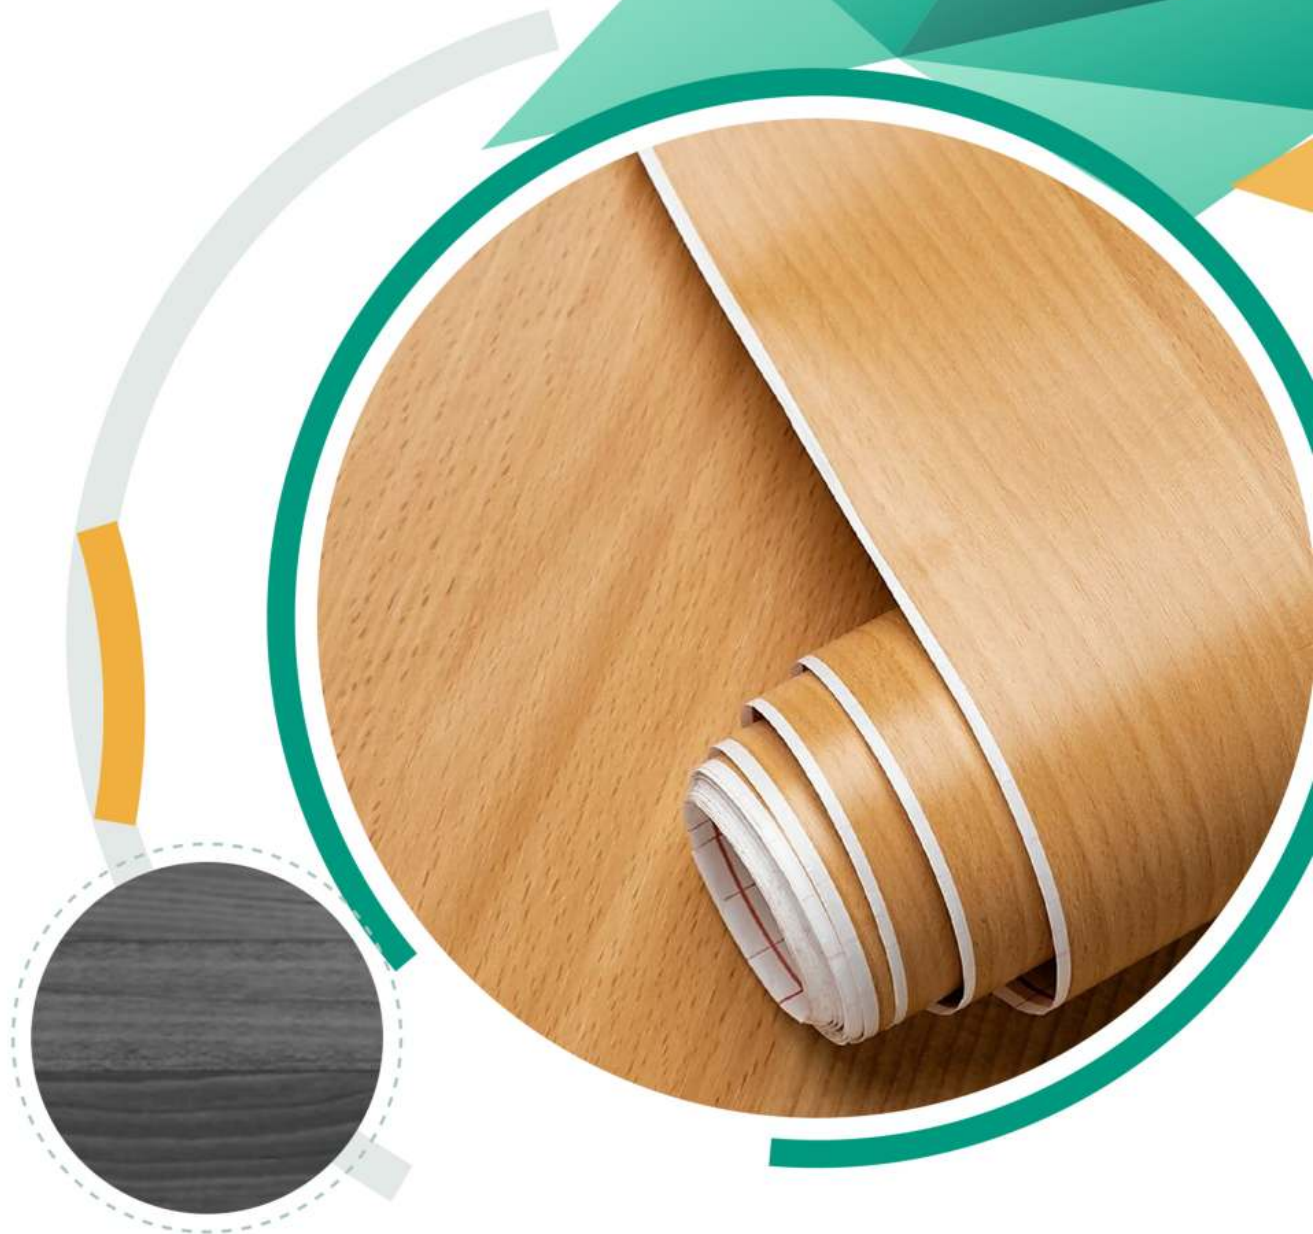

HETEROGENEOUS VINYL FLOOR

SAPPHIRE WOOD

Premium wood-look heterogeneous vinyl flooring with a 0.35 mm wear layer — warm timber character with the durability, comfort and easy upkeep of vinyl.

2 mm
THICKNESS

2 × 15 m
ROLL SIZE

0.35 mm
WEAR LAYER

Premium Finish

2 mm thickness · 0.35 mm wear layer

2 × 15 mtr. roll

30 sq.mtr. / 323.62 sft.

01



● **BLD-211**

AFRICAN TEAK BROWN



● **BLD-212**

AFRICAN OAK NATURAL



● **BLD-213**

AFRICAN OAK BROWN



● **BLD-214**

AFRICAN TEAK WALLNUT

Premium Finish

2 mm thickness · 0.35 mm wear layer

2 × 15 mtr. roll

30 sq.mtr. / 323.62 sft.



● **BLD-215**

AFRICAN OAK R. BROWN



● **BLD-216**

AFRICAN OAK LIGHT BROWN



● **BLD-217**

AFRICAN OAK CC YELLOW



● **BLD-218**

AFRICAN TEAK GREY

BOLLARD SAPPHIRE WOOD

Specification

Heterogeneous vinyl floor · Premium finish

PARTICULAR	TEST METHOD	SAPPHIRE PREMIUM
THICKNESS (MM)	EN428	2 MM
ROLL WIDTH	EN426	2 MTR
ROLL LENGTH	EN426	15 MTR
WEAR LAYER	EN429	0.35 MM
TOTAL WEIGHT/SQM	EN430	3.6 KG ± 5%
RESIDUAL INDENTATION	EN433	≤ 0.10 mm
ABRASION RESISTANCE	EN649	WEAR GROUP P
DIMENSION STABILITY	IS3462	≤ 0.40%
MOISTURE MOVEMENT	IS3462	≤ 0.40%
PERFORMANCE CLASSIFICATION	EN685	33
SLIP RESISTANCE	DIN51130	R9

Sapphire Wood

PREMIUM FINISH · HETEROGENEOUS VINYL

Sapphire Wood Premium brings the warmth of natural timber to interiors that have to perform — a 0.35 mm wear layer, Class 33 commercial rating and R9 slip resistance, supplied in 2 × 15 mtr. rolls for fast, seamless installation.

2 mm

THICKNESS

0.35 mm

WEAR LAYER

Class 33

CLASSIFICATION

R9

SLIP RATING

COMPLETE INFRASTRUCTURE PVT. LTD.



Head Office

C-18, Lower Ground Floor,
Okhla Industrial Area
Phase - 1 New Delhi
110020



+91 9999660690



Branch Office

F-446, Phase-2, Transport
Nagar LUCKNOW
226012



info@bollard.co.in



Factory

Asodha killa no - 113/18
(8-0) Asodha, Bahadurgarh
Dist. - Jhajjar Haryana
124507



www.bollard.co.in